


Clover Station Duo 2 Specifications

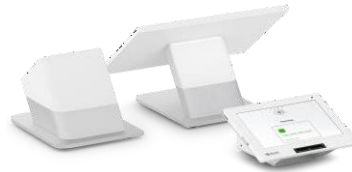

Main System: Located in Station Duo Terminal

Clover Station Duo 2 Specifications

Processor	Qualcomm Snapdragon 660 Octa Core Processor, 1.8GHz 4 Cores and 2.2GHz 4 Cores
Memory – RAM	2GB LPDDR4x
Storage Disk Drive	16GB eMMC
Operating System	Android 10.x, multi-language support
Payment Interface	Magnetic Stripe – 3 track -500K swipes – bi-directional Chip Card – ISO 7816 500K inserts NFC Contactless
Security and Payment Certification	PCI PTS 6.x EMV Contact L1 & L2 MasterCard TQM I EMV Contactless L1 v3.x Visa payWave Mastercard Contactless American ExpressPay

Display

Size	Merchant facing display: 14.0" IPS FHD display Customer facing display: 8.0" IPS HD display Both displays have chemically strengthened cover glass with anti-fingerprint coating
------	--

Form Factor and Specifications

Dimensions (L x W x H)	Bundle overbox dimension: 20.9 x 16.5 x 11.8 in/531 x 419 x 300 mm Station Duo terminal: 9.9 x 8.2 x 4.8 in./250 x 205 x 120 mm Station Duo display: 13.35 x 8.72 x 8.81 in/339.2 x 221.56 x 223.91 mm Station printer: 111.1 x 8.5 x 10.8 in/282 x 216 x 275 mm
Gross Weight (Package weight)	23.1 lbs /10.5 kgs
Device Weight (Does not include Starter Kit)	Station Duo terminal: 3.3 lb/1.5 kg Station Duo display: 7.7 lb/3.5 kg Station printer: 4.4 lb/2.0 kg
AC Adaptor and Power	AC input: 100-240 V, 1.8 A, 50-60 Hz; DC output: 24 V, 5 A
Audio/Microphone	Internal dynamic speakers Separate speakers on both Station Duo terminal and Station Duo display Single microphone input 3.5 mm Stereo Audio Jack located in the Station Duo 2 terminal Physical volume buttons
Camera/Scanning	Dual cameras – 5.0M pixels Supports 1D/2D with advanced Zebra scanning software
Display Cable Length (included with the unit)	1.5 meters

PIN Pad: Digital and/or Physical	Virtual keypad for PIN entry on Station Duo 2 terminal
SIM Card	Micro SIM (pre-installed)
Printer	Thermal line dot printing with paper out sensor maximum printing speed at 200 mm/sec
Paper Roll Size	Up to 83 mm (3.25 inch) diameter rolls
Employee Login Method	Employee Passcode

Ports and Connectivities

Ports (USB, Ethernet and Cash Drawers)	4x USB Type A ports (2x @ 5V/1A + 2x @ 5V/2A output) Wired LAN -10/100 fast Ethernet port 2 RJ11 ports for 2 cash drawers opened independently
Wi-Fi Connectivity	802.11a/b/g/n/ac, 2.4GHz and 5GHz
LAN Connectivity	Wired LAN -10/100 Fast Ethernet
WWAN Connectivity	4G/LTE

Environmental Conditions

Operating Temperature	Operating range 0°C to 40°C
Operating Humidity	Non-condensing 10% to 90% Relative Humidity
Storage Temperature	Storage -20°C to 60°C
Operating Altitude	Tested to 10,000 ft.
Water Proof	Tested to IPX4
Dust Proof	IP5X

Device Accessibility

Volume control (incl. in-built speaker, which is loud enough to be heard in noisy environments for example café or bar)	Volume control buttons adjacent to customer facing screen Also through UI
Voice assistant (clear, human-quality voice)	Yes, Google talkback through audio jack
Ability to connect to a stylus pen (for example for motor skill deficiencies)	Yes (passive stylus pen)
Ability to connect headphones (through 3.5 MM headphone jack and wirelessly)	Yes (for headphone jack), no wireless support
High contrast theme	Yes
Font size adjustment	Yes
Brightness adjustment	Yes
Sound detector (for example, microphone)	Yes
Universal switch	Yes

Physical (tactile) PIN entry option	Yes, with Clover PIN Entry Aid
--	--------------------------------

Accessories

Available for purchase	Mini PIN shield, Mini PIN Entry Aid, cash drawer, Station Duo display cable (4 meters)
------------------------	--

© 2023 Clover Network, LLC. The Clover name and logo are registered trademarks owned by Clover Network, LLC and are registered or used in the U.S. and many foreign countries. Use of Clover requires a Merchant Processing Agreement. All trademarks, service marks and trade names referenced in this material are the property of their respective owners. 1805452